

**JUMO GmbH & Co. KG**

Delivery address: Mackenrodtstraße 14,  
36039 Fulda, Germany  
Postal address: 36035 Fulda, Germany  
Phone: +49 661 6003-0  
Fax: +49 661 6003-607  
e-mail: mail@jumo.net  
Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**

JUMO House  
Temple Bank, Riverway  
Harlow, Essex CM20 2DY, UK  
Phone: +44 1279 635533  
Fax: +44 1279 635262  
e-mail: sales@jumo.co.uk  
Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**

8 Technology Boulevard  
Canastota, NY 13032, USA  
Phone: 315-697-JUMO  
1-800-554-JUMO  
Fax: 315-697-5867  
e-mail: info@jumo.us  
Internet: www.jumo.us



## Screw-in thermocouples with terminal head form B


- For temperatures from -200 to +800 °C
- Available with different thermocouples
- As single or double thermocouple
- Connection head form B, BUZ, BUZH, BBK
- Available with transmitter

Screw-in thermocouples are preferentially used for measuring temperatures in fluids and gases. A decisive selection criterion is the reliable sealing feature of this installation type with vacuum and with overpressure. Application fields are found, amongst others, in heating, furnace/kiln and process technology.

The connection head is suitable for ambient temperatures up to +100 °C. The versions BUZ, BUZH and BBK are also available in addition to the standard connection head, form B.

Sheaths made of stainless steel protect the measuring insert against chemical influences and mechanical damage.

Thermocouples (elements) as per DIN EN 60584, class 2 and DIN 43710 are set into the measuring insert. Versions with two thermocouples are also possible.

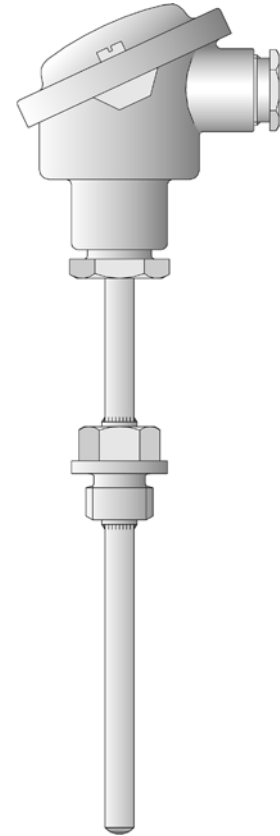

## Technical data

**Terminal head**

Form B DIN 43729, die-cast aluminum, M 20x1.5; IP65, ambient temperature -40 to +100 °C  
Form BUZ, die-cast aluminum, M 20x1.5; IP65, ambient temperature -40 to +100 °C  
Form BUZH, die-cast aluminum, M 20x1.5; IP65, ambient temperature -40 to +100 °C  
Form BBK, plastic, M 20x1.5; IP54, ambient temperature -30 to +130 °C  
Caution: reduced ambient temperature range when using transmitters,  
Data sheets 70.7010 and 70.7060

**Extension tube**

Stainless steel 1.4571, length 130 mm

**Process connection**

thread, stainless steel 1.4571

**Sheath**

Stainless steel 1.4571, diameter 9 mm

**Measuring insert**

Exchangeable, insulated structure:

- 1x Fe-CuNi „J“, DIN EN 60584, cl. 2, operating temperature -200 to +600 °C
- 1x Fe-CuNi „L“, DIN 43710, cl. 2, operating temperature -200 to +600 °C
- 1x NiCr-Ni „K“, DIN EN 60584, cl. 2, operating temperature -200 to +800 °C
- 2x Fe-CuNi „J“, DIN EN 60584, cl. 2, operating temperature -200 to +600 °C
- 2x Fe-CuNi „L“, DIN 43710, cl. 2, operating temperature -200 to +600 °C
- 2x NiCr-Ni „K“, DIN EN 60584, cl. 2, operating temperature -200 to +800 °C

**Transmitter**

Programmable transmitter, 4 to 20 mA/20 to 4 mA output, data sheet 70.7010  
Wtrans B programmable head transducer with radio transmission, data sheet 70.7060  
(suitable Wtrans receivers, data sheet 90.2931)

**Accessories**

Sheath, data sheet 90.9710 (90.9721)


**JUMO GmbH & Co. KG**  
Delivery address: Mackenrodtstraße 14,  
36039 Fulda, Germany  
Postal address: 36035 Fulda, Germany  
Phone: +49 661 6003-0  
Fax: +49 661 6003-607  
e-mail: mail@jumo.net  
Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
JUMO House  
Temple Bank, Riverway  
Harlow, Essex CM20 2DY, UK  
Phone: +44 1279 635533  
Fax: +44 1279 635262  
e-mail: sales@jumo.co.uk  
Internet: www.jumo.co.uk


**JUMO Process Control, Inc.**  
8 Technology Boulevard  
Canastota, NY 13032, USA  
Phone: 315-697-JUMO  
1-800-554-JUMO  
Fax: 315-697-5867  
e-mail: info@jumo.us  
Internet: www.jumo.us



## Dimensions

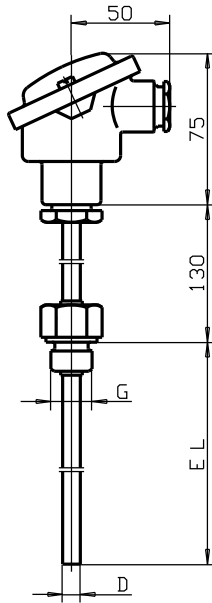

Basic type 901020/10

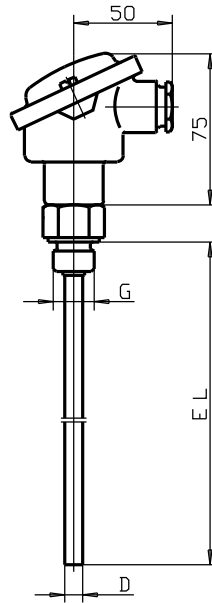

Basic type 901020/20

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14,  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 e-mail: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex CM20 2DY, UK  
 Phone: +44 1279 635533  
 Fax: +44 1279 635262  
 e-mail: sales@jumo.co.uk  
 Internet: www.jumo.co.uk


**JUMO Process Control, Inc.**  
 8 Technology Boulevard  
 Canastota, NY 13032, USA  
 Phone: 315-697-JUMO  
 1-800-554-JUMO  
 Fax: 315-697-5867  
 e-mail: info@jumo.us  
 Internet: www.jumo.us



**Order specifications: Screw-in thermocouples with connection head form B**

**(1) Basic type**

901020/10 Screw-in thermocouple  
with extension tube and continuous sheath



901020/20 Screw-in thermocouple  
without extension tube and continuous sheath



**(2) Operating temperature in °C**

x x 150 -200 to +600 °C  
 x x 165 -200 to +800 °C

**(3) Measuring insert**

x x 1040 1x Fe-CuNi "J"  
 x x 1042 1x Fe-CuNi "L"  
 x x 1043 1x NiCr-Ni "K"  
 x x 2040 2x Fe-CuNi „J“  
 x x 2042 2x Fe-CuNi „L“  
 x x 2043 2x NiCr-Ni „K“

**(4) Sheath diameter D in mm**

x x 9 Ø 9 mm

**(5) Fitting length EL in mm (100 ≤ EL ≤ 1000)**

x x 160 160 mm  
 x x 200 200 mm  
 x x 250 250 mm  
 x x 300 300 mm  
 x x 400 400 mm  
 x x 600 600 mm  
 x x ... Specification in plain text (50 mm steps)

**(6) Process connection**

x x 104 Screw-connection G 1/2  
 x x 105 Screw-connection G 3/4  
 x x 106 Screw connection G 1  
 x x 126 Screw-connection M 18 x 1.5

**(7) Extra codes**

x x 000 no extra code  
 x 306 Extension tube 70 mm  
 x x 320 terminal head Form BUZ  
 x x 321 terminal head Form BUZH  
 x x 322 Connection head form BBK  
 x x 331 1x transmitter programmable output 4 to 20 mA/20 to 4 mA<sup>3</sup>, data sheet 70.7010  
 x x 335 2x transmitter programmable output 4 to 20 mA/20 to 4 mA<sup>3</sup>, data sheet 70.7010  
 x x 859 1x Wtrans B programmable head transducer with radio transmission, data sheet 70.7060

**Order code**      (1)      -      (2)      -      (3)      -      (4)      -      (5)      -      (6)      /      (7)      ....<sup>1</sup>  
**Order example**      901020/10      -      150      -      1042      -      9      -      250      -      104      /      000

Note: Sheaths, Data Sheet 90.9710 (90.9721)

<sup>1</sup> List extra codes in sequence, separated by commas.  
<sup>3</sup> Specify measuring range and output signal in plain text.

**JUMO GmbH & Co. KG**

Delivery address: Mackenrodtstraße 14,  
36039 Fulda, Germany  
Postal address: 36035 Fulda, Germany  
Phone: +49 661 6003-0  
Fax: +49 661 6003-607  
e-mail: mail@jumo.net  
Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**

JUMO House  
Temple Bank, Riverway  
Harlow, Essex CM20 2DY, UK  
Phone: +44 1279 635533  
Fax: +44 1279 635262  
e-mail: sales@jumo.co.uk  
Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**

8 Technology Boulevard  
Canastota, NY 13032, USA  
Phone: 315-697-JUMO  
1-800-554-JUMO  
Fax: 315-697-5867  
e-mail: info@jumo.us  
Internet: www.jumo.us



## Accessories for programmable 2-wire transmitter type 707010 in the accessories data sheet 70.9770

Part	Sales No.:
PC interface with TTL/RS232 converter and adapter (socket connector)	70/00350260
PC interface with USB/TTL converter, adapter (socket connector) and adapter (pins)	70/00456352
Special programming (standard measuring range 0 to 100 °C)	-
Setup program on CD-ROM, multilingual	70/00378733

## Accessories for Wtrans B, programmable head transmitter with radio transmission Type 707060

Part	Sales No.:
Lithium battery 3.6 V, 2.2 Ah (size AA)	70/00547559
PC interface with USB/TTL converter, adapter (socket) and adapter (pins)	70/00456352
PC interface with TTL/RS232 converter and adapter (socket connector)	70/00350260
Setup program on CD-ROM, multilingual	70/00488887
Setup program including OnlineChart on CD-ROM, multilingual	70/00549067
OnlineChart activation	70/00549188